


# CFMR2 DOWNLIGHT



TECHNICAL DRAWING

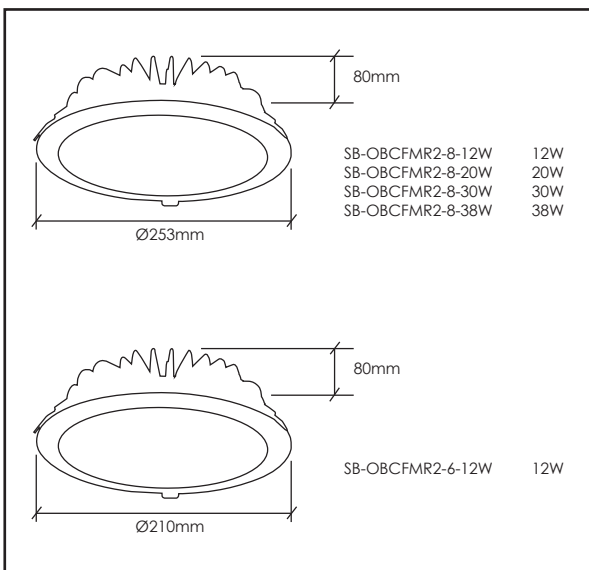

OPTIONAL 320mm ADAPTOR PLATE

## DESCRIPTION

The CFMR2 range are a practical, cost effective range of downlights with high lumen outputs and a shallow recessing depth. This makes it an ideal light for small ceiling voids and areas that require high light levels on small budgets.

## LUMINAIRE INFORMATION

### LUMINAIRE

Power	12W, 20W, 30W, 38W	
Input power	240V/50HZ	
Delivered Lumens (Tri-colour, 5000°K)	12W	1216 lm
	20W	2100 lm
	30W	3150 lm
	38W	3990 lm
	(Other options available on request)	
Colour Temperature	Integrated colour switching module (switches between 3000°K/4000°K/5000°K)	

## TECHNICAL INFORMATION

Luminous Efficacy	94~110lm/W
Beam angle	120°
IP rating	IP20
CRI	Ra80
Dimmable	No
Flex and plug	Yes
Adaptor plate	Optional (320mm)
Rated operating life	50,000hrs
Warranty	5 Years
Approvals	ESS and VEET approved

## DIMENSIONS

MODEL	WATTS	DIMENSION (DIA X HEIGHT)	CUT OUT
SB-OBCFMR2-6-12W	12W	Ø210 X 80mm	175-205mm
SB-OBCFMR2-8-12W	12W	Ø253 X 80mm	210-245mm
SB-OBCFMR2-8-20W	20W	Ø253 X 80mm	210-245mm
SB-OBCFMR2-8-30W	30W	Ø253 X 80mm	210-245mm
SB-OBCFMR2-8-38W	38W	Ø253 X 80mm	210-245mm