



# PL2 LED PANEL

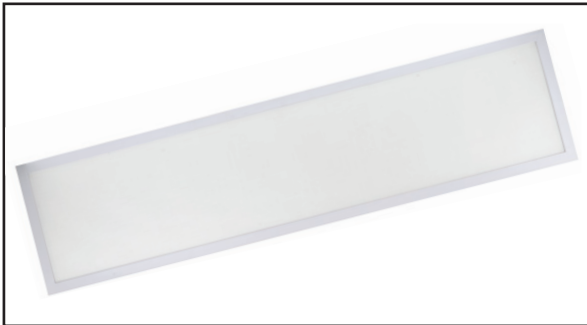

## ACCESSORIES

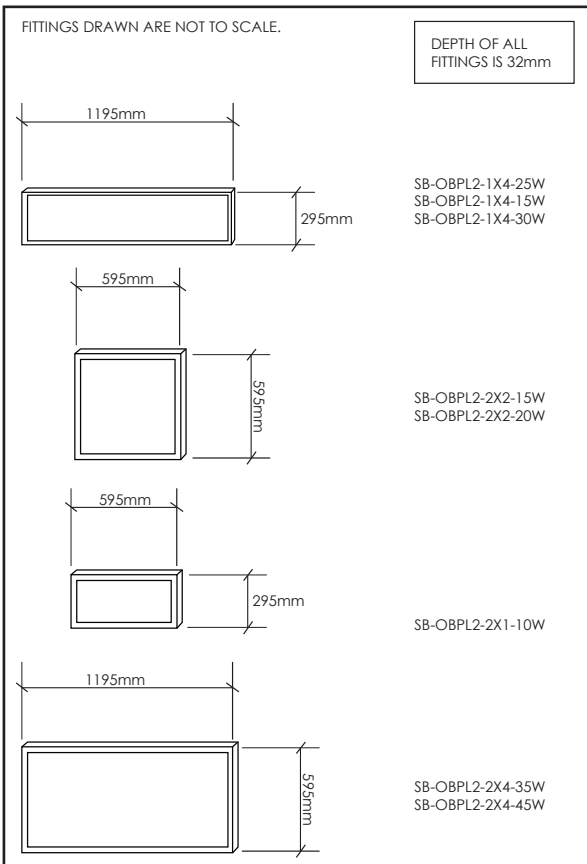

## TECHNICAL DRAWING

Product information: The descriptors and illustrations in this publication apply to the specific products and models described as at the date of issue. Under our policy of continuous product development, product specifications may change without notice. Prospective purchasers should therefore check with their supplier to ensure this publication correctly describes the products that are being offered for sale. All information supplied is to be used for general reference purposes only and is on the understanding that Smart Bright will not be liable for any loss, liability or damage of whatever kind arising as a result of reliance on such information. Colours of products illustrated are as close as printing limitations allow. Smart Bright will at all times comply with its obligations pursuant to law including Trade Practices (Australian Consumer Law) Act and Regulations.

## DESCRIPTION

PL2 is a slim, energy saving panel that is a cost and energy saving, alternative to traditional fluorescent troffer fittings used in offices. The PL2 fitting is comprised of several layers of varying materials designed to reduce glare while increasing light output and efficiency.

## LUMINAIRE INFORMATION

### LUMINAIRE

Power	10W, 15W, 20W, 25W, 30W, 35W, 45W
Input power	240V/50HZ
Power Factor	.9
Colour Temperature	3000°K/4000°K/5000°K/6500°K also available in Integrated colour switching module (switches between 3000°K/4000°K/5000°K)

## TECHNICAL INFORMATION

UGR	<19* (*SB-OBPL2-1X4-25W only)
Luminous Efficacy	>120 lm/W* (*SB-OBPL2-1X4-25W only)
IP rating	IP20
CRI	Ra80+
Dimmable	No
Flex and plug	Yes
Rated operating life	50,000hrs
Warranty	3 Years
Approvals	ESS and VEET approved* (*SB-OBPL2-1X4-25W only)

## DIMENSIONS AND DELIVERED LUMENS

MODEL	WATTS	LUMENS (@5000°K)	DIMENSION (L X W X H)
SB-OBPL2-1X4-25W	25W	3000 lm	1195 X 295 x 32 mm
SB-OBPL2-1X4-15W	15W	1500 lm	1195 x 295 x 32 mm
SB-OBPL2-1X4-30W	30W	3600 lm	1195 x 295 x 32 mm
SB-OBPL2-2X2-15W	15W	1900 lm	595 x 595 x 32 mm
SB-OBPL2-2X2-20W	20W	1900 lm	595 x 595 x 32 mm
SB-OBPL2-2X1-10W	10W	600 lm	295 x 595 x 32 mm
SB-OBPL2-2X4-35W	35W	4500 lm	595 x 1195 x 32 mm
SB-OBPL2-2X4-45W	45W	5400 lm	595 x 1195 x 32 mm